

Flanged Pattern Globe Valve DIN PN16




- ASTM A351 CF8M 316 Stainless Steel Body, Bonnet and Disc.
- 316 Stainless Steel Stem and Trim. Ductile Iron painted Handwheel.
- PTFE Gland Packing and Bonnet Seal. Bronze Bush.
- Bolted Bonnet. Outside Screw and Yoke. Rising Stem.
- Metal to Metal Taper Disc.
- Face to Face dimensions in accordance with DIN 3202/F-1.
- 16 Bar/g pressure rated.
- -20 / +180 deg C Temp rated.
- CE marked in accordance with the PED 2014/68/EU (from 1.1/4").


Design standard – ANSI B16.34

Test standard – API 598

Available size range: 1/2" - 6"

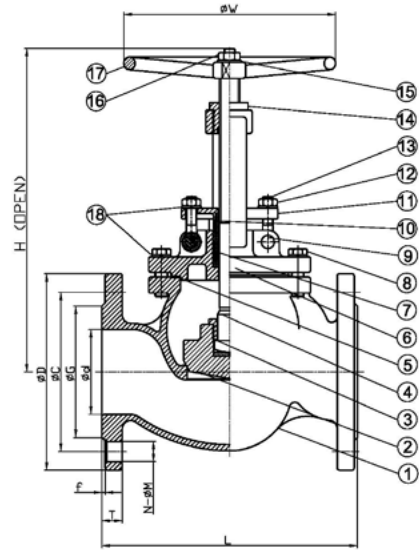

Item	Part	Material	Qty.
1	Body	CF8M	1
2	Disc	CF8M	1
3	Disc Cover	CF8M	1
4	Stem	SUS316	1
5	Gasket	PTFE	1
6	Bonnet	CF8M	1
7	Gland Packing	PTFE	1
8	Bonnet Bolt	SUS304	1
9	Hinge Pin	SUS304	1
10	Sleeve	PTFE	1
11	Gland	CF8	1
12	Nut	SUS304	1
13	Eye Bolt	SUS304	1
14	Yoke Sleeve	BRONZE	1
15	Name Plate	SUS304	1
16	Nut	SUS304	1
17	Hand Wheel	FCD400	1
18	Spring Washers	SUS304	1

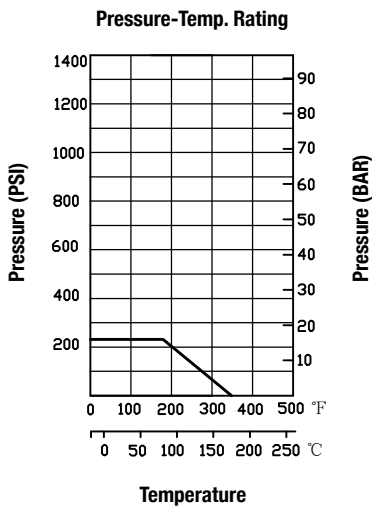

SIZE	d	L	H	W	D	C	G	f	T	N-øM
1/2"	15	130	178	140	95	65	45	2	14	4-ø14
3/4"	20	150	181	140	105	75	58	2	16	4-ø14
1"	25	160	200	140	115	85	68	2	16	4-ø14
1-1/4"	32	180	243	160	140	100	78	2	16	4-ø18
1-1/2"	40	200	245	160	150	110	88	3	16	4-ø18
2"	50	230	258	200	165	125	102	3	18	4-ø18
2-1/2"	65	290	310	200	185	145	122	3	18	4-ø18
3"	80	310	325	250	200	160	138	3	20	8-ø18
4"	100	350	390	250	220	180	158	3	20	8-ø18
6"	150	480	531	350	285	240	212	3	22	8-ø22