


No.	PART NAME	MATERIAL
1	BODY	A351 CF8M
2	END CAP	A351 CF8M
3	BALL	A351 CF8M
4	BALL SEAT	DELRIN® or PEEK®
5	BODY SEAL	PTFE
6	STEM	17-4 PH
7	THRUST WASHER	RPTFE
8	STEM PACKING	GRAPHITE
9	GLAND NUT	SUS 304
10	STEM WASHER	SUS 304
11	STEM NUT	SUS 304
12	HANDLE	SUS 304
13	HANDLE COVER	PVC
14	HANDLE LOCKING	SUS 304
15	HANDLE STOP	SUS 304

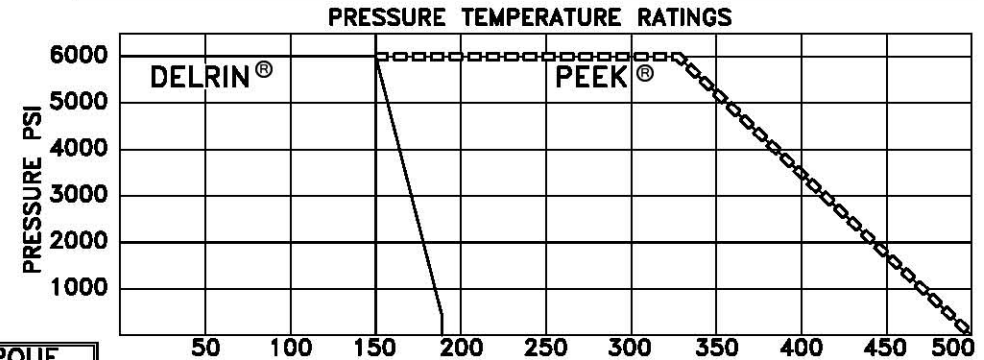

- * WORKING PRESSURE: 6000PSI
- * TWO PIECE FULL PORT BALL VALVE, SCREWED ENDS, or SOCKET WELDED ENDS
- * INVESTMENT CAST BODY
- * FLOATING BALL
- * BLOW-OUT PROOF STEM
- * 1/4"~ 2" FULL PORT T-205S 2" STANDARD PORT
- * FIRE-SAFE DESIGN
- * STANDARD LOCKING HANDLE
- * ACTUATOR MOUNTING PAD
- * BALL INCLUDES PRESSURE EQUALIZATION HOLE TO PREVENT TRAPPED PRESSURE IN BODY CAVITY

DELRIN SEAT

SIZE	TOUQUE IN/BL
1/4"	100
3/8"	100
1/2"	140
3/4"	250
1"	500
1 1/2"	750
2" T-205S	800
2"	1000

SIZE	øA	SW	B	C	D	PCD øE	F
1/4"	6.4	14.1	56	76.3	129	36	M5*0.8P
3/8"	9.6	17.6	56	76.3	129	36	M5*0.8P
1/2"	12.7	21.9	56	101.4	129	36	M5*0.8P
3/4"	20.0	27.1	68	108.2	150	42	M5*0.8P
1"	25.4	34.0	88	114.4	205	42	M5*0.8P
1 1/2"	38.1	48.7	113	132.8	260	50	M6*1.0P
2" T-205S	38.1	61.1	113	168.2	260	50	M6*1.0P
2"	50.8	61.1	122	168.7	260	50	M6*1.0P

G.C. SUPPLIES UK LTD
 TEL:+44 (0) 161-681-8114
 FAX:+44 (0) 161-947-0148

DESC	2PC BALL VALVE 6000PSI	DRAWING #		ETG M-2HP
APPROVED BY.		DATE	01/10/2010	
DRAWER	<i>Y.J. Lee</i>	MATERIAL		MODIFICATION