

G.C. Supplies UK Limited

Stainless Steel Manway Door stock range

Round Low/Non-Pressure Manway Doors

Model N230/B



316L Stainless Steel construction. EPDM Seal. 201mm Diameter Neck Ring. 85mm high Neck. 0.5 bar/g Max Pressure

Model 240/B



316L Stainless Steel construction. EPDM Seal. 306mm Diameter Neck Ring. 65mm high Neck. 0.1 bar/g Max Pressure. Back-side and side-swing opening.

Model TV/400/B



316L Stainless Steel construction. EPDM Seal. 404mm Diameter Neck Ring. 100mm high Neck. Zero Pressure. Back-side and side-swing opening.

Model TV/450/B



316L Stainless Steel construction. EPDM Seal. 454mm Diameter Neck Ring. 100mm high Neck. Zero Pressure. Back-side and side-swing opening.

Model TV/500/B



316L Stainless Steel construction. EPDM Seal. 520mm Diameter Neck Ring. 100mm high Neck. Zero Pressure. Back-side and side-swing opening.

Model TV/600/B



316L Stainless Steel construction. EPDM Seal. 620mm Diameter Neck Ring. 100mm high Neck. Zero Pressure. Back-side and side-swing opening.

Model TV/450



304L Stainless Steel construction. EPDM Seal. 454mm Diameter Neck Ring. 100mm high Neck. Zero Pressure. Back-side and side-swing opening.

Model TV/500



304L Stainless Steel construction. EPDM Seal. 520mm Diameter Neck Ring. 100mm high Neck. Zero Pressure. Back-side and side-swing opening.

Model TV/600



304L Stainless Steel construction. EPDM Seal. 620mm Diameter Neck Ring. 100mm high Neck. Zero Pressure. Back-side and side-swing opening.

Model T1/G500



304L Stainless Steel main body construction. Soda Lime Tempered Glass Lid. EPDM Seal. 518mm Diameter Neck Ring. 100mm high Neck. Zero Pressure. Back-side opening. 120 Deg C Max Temperature.

Also available in sizes 400mm & 450mm on factory lead time.

Oval Pressure Manway Doors

Model 182/B



316L Stainless Steel construction. EPDM Seal. 440mm x 320mm Diameter Neck Ring. 80mm high Neck. 1.3 bar/g Max Pressure. Inward opening. PED Certified.

Model 200/LZD/B (formerly LKD)



316L Stainless Steel construction. EPDM Seal. 535mm x 435mm Diameter Neck Ring. 60mm high Neck. 4.8 bar/g Max Pressure. Inward and Outwards opening. PED Certified.

Model 201 /LZD (formerly LKD)



304L Stainless Steel construction. EPDM Seal. 535mm x 435mm Diameter Neck Ring. 100mm high Neck. 4.8 bar/g Max Pressure. Inward and Outwards opening. PED Certified.

Model 200 /LZD (formerly LKD)



304L Stainless Steel construction. EPDM Seal. 535mm x 435mm Diameter Neck Ring. 60mm high Neck. 4.8 bar/g Max Pressure. Inward and Outwards opening. PED Certified.

Rectangular Pressure Manway Doors

Model Z/175/B



316L Stainless Steel construction. EPDM Seal. 300mm x 165mm Diameter Neck Ring. 60mm high Neck. 0.5 bar/g Max Pressure. Outwards opening.

Model 285/B



316L Stainless Steel construction. EPDM Seal. 184mm x 234mm Diameter Neck Ring. 30mm high Neck. 0.5 bar/g Max Pressure. Outwards opening.

Model 295/B



316L Stainless Steel construction. EPDM Seal. 234mm x 184mm Diameter Neck Ring. 40mm high Neck. 0.5 bar/g Max Pressure. Outwards opening.

Model 160



304L Stainless Steel construction. EPDM Seal. 332mm x 440mm Diameter Neck Ring. 60mm high Neck. 0.6 bar/g Max Pressure. Outwards opening. Hinged on long side

Model 165



304L Stainless Steel construction. EPDM Seal. 440mm x 332mm Diameter Neck Ring. 60mm high Neck. 0.5 bar/g Max Pressure. Outwards opening. Hinged on short side.

Model 1500




304L Stainless Steel construction. EPDM Seal. 432mm x 555mm Diameter Neck Ring. 60mm high Neck. 1.0 bar/g Max Pressure. Outwards opening. Hinged on long side

Model 1600



304 Stainless Steel construction. EPDM Seal. 432mm x 555mm Diameter Neck Ring. 60mm high Neck. 0.8 bar/g Max Pressure. Outwards opening. Hinged on short side.

Manway Gaskets/Seals

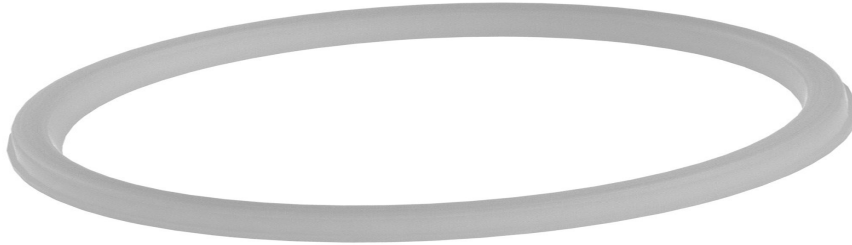

We carry a full range of Spare Gaskets to fit every Manway held in our standard stock range in EPDM material only. Other materials (see below) are available on factory lead times.

Gasket Material Temperature range

| | | |
|----------|--------------------------|----------------------|
| EPDM | Colour Grey RAL 7040 | -15 / +90 Degrees C |
| NBR | Colour White RAL 9016 | -30 / +110 Degrees C |
| Silicone | Colour Transparent White | -50 / +200 Degrees C |
| FPM | Colour Black RAL 9017 | -10 / +250 Degrees C |

All Manway Doors shown are usually held as stock items at our Manchester warehouse and can be shipped for next day delivery. Other models, grades and seal materials are available on factory lead times from Italy.

Please enquire with our sales office for further details.

Tel: 0161 681 1842 Fax: 0161 683 4571

Email: sales@gcstainless.co.uk Web: www.gcstainless.co.uk