


BSP Screwed Suction Basket Filter

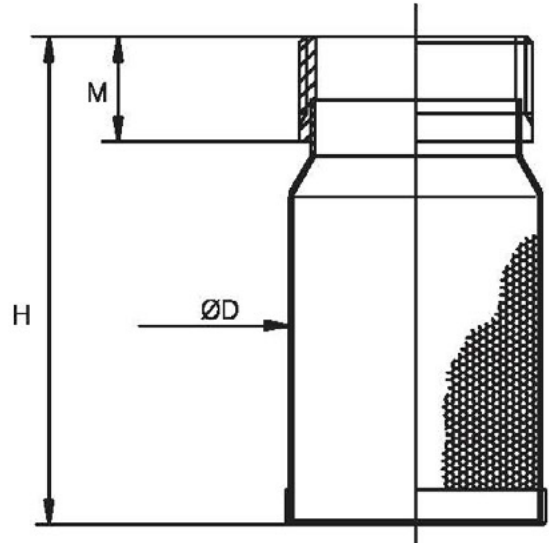

- All Stainless Steel construction.
- Male Threaded in accordance with UNI ISO 228 BSP.
- 1 mm aperture (13 mesh) on sizes 1/2" - 2".
- 1.8 mm aperture (8 mesh) on sizes 2.1/2" - 4".

This product is designed to be used at the end of suction pipework, either on it's own or in conjunction with a Check Valve as a Footvalve Strainer, to protect the pump (or similar) from any large pieces of foreign matter or debris from entering the pipework system.

If the Suction Basket Filter is to be used in conjunction with a check valve, we recommend the use of a Barrel Type spring check valve (NTC SPV-20, ETG SPV-69S or ETG SPV-100).

Available size range: 1/2" - 4"

SIZE	H	M	ØD	Weight (gr)
1/2"	55	15	1,0	15
3/4"	62	15	1,0	25
1"	71	15	1,0	34
1-1/4"	80	20	1,0	52
1-1/2"	90	20	1,0	62
2"	101	20	1,0	86
2-1/2"	111	25	1,8	135
3"	125	25	1,8	168
4"	144	25	1,8	253